


“
Safety First,
Better Style Always
”

SRF
Group - since 2001

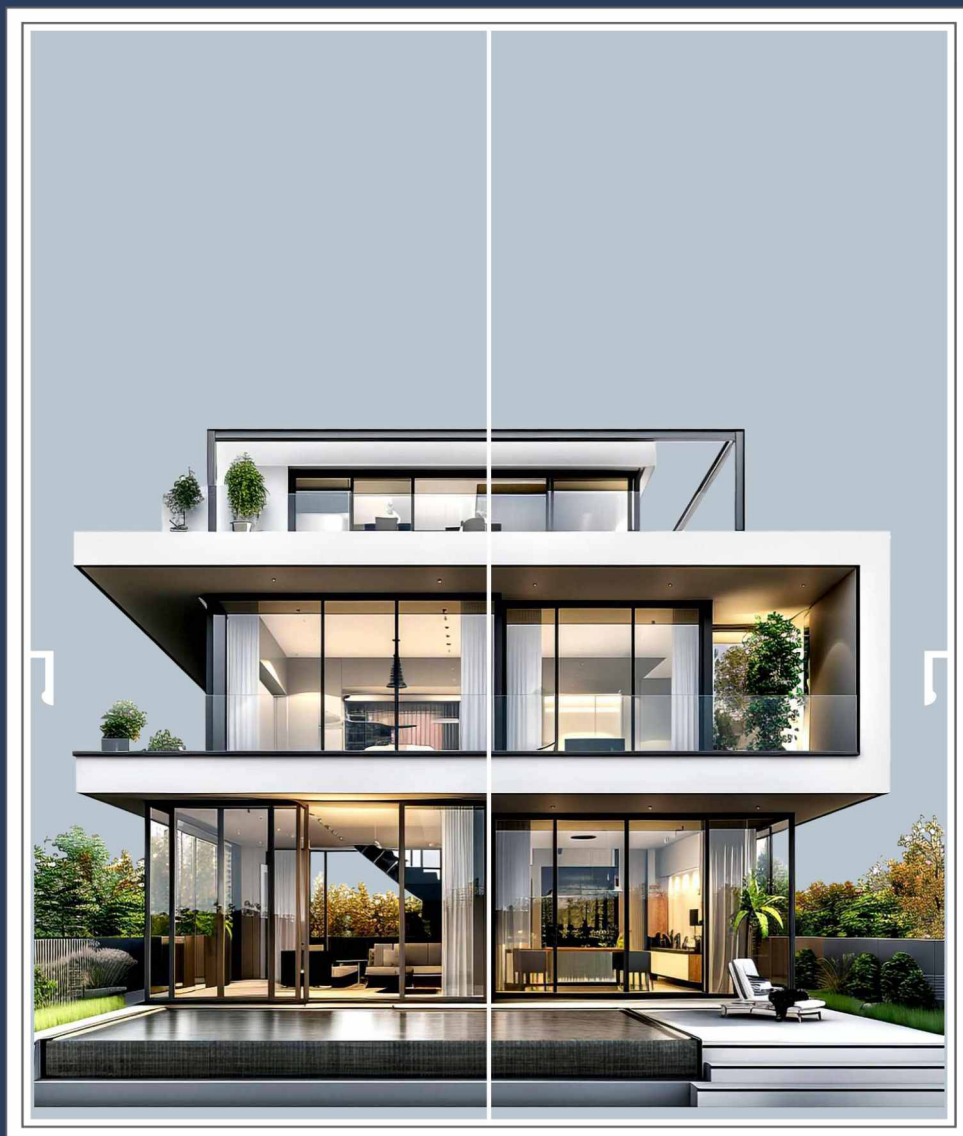

Celsö

italy windows series

UPVC & ALUMINIUM SYSTEM WINDOW
PARTITION | GLASS RAILING



Celsö
italy windows series



About Celso

In this competitive era, where every business is striving towards increasing their sales, our ultimate motive at SRF Build Techno industries is not serve our customers with quality solution. Customer satisfaction is the first and foremost concern of Celso Italy windows and door for which we put our best efforts to meet their expectations.

Quality

The company has a comprehensive and detail - oriented quality system That ranges from product development sales. Critical product inspection is carried out by independent testing laboratories.

Location

SRF Build Techno Industries is located in the Ankleshwar, Gujarat, india, well conn- ected by rail, road and air. Equipped with a state-of-the-art manufacturing facility, srf build techno industries has an installed capacity of about 2100 windows per month per shift.

CS-ULTRA SLIM

Aluminium Sliding Slim Door



Multi lock system



Sight Line 18 mm




45° Degree system

Configurations - CS-ULTRA SLIM

Company offers turn - key services and systems which have been brought from the european market in designing, manufacturing, installation and exporting its finished aluminium product to the building industry such as luxury villas and bungalow having a full glass house and from where outside view is easily accessible. The main objective of the elevation is to give large and extravagant look. There is multi lock system in it which combines the latest security and protection features with user friendly comfort and elegant designs and it also has an impact wheel that will last longer.

Technical Windows Drawing

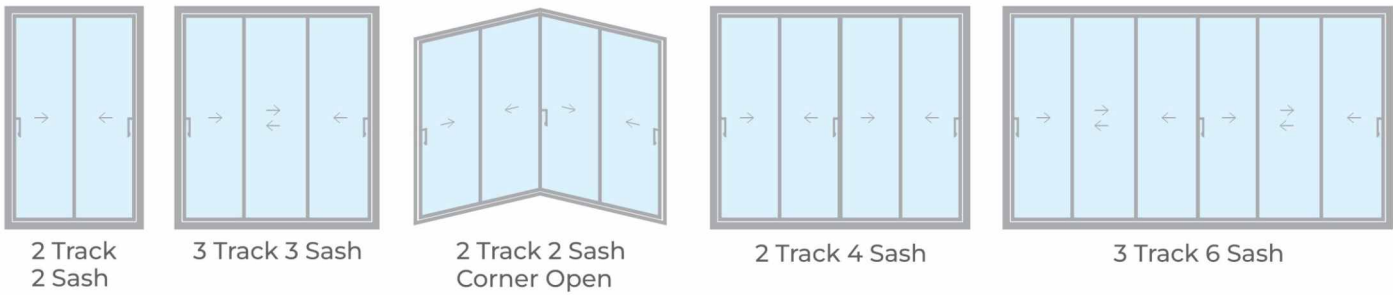

CS - ULTRA SLIM
Specification

Sight Line or Face Width	▶ 18 mm
Section Joint	▶ 'L' Clamp Fitting with Grub Screws
Sash Degree	▶ 90 Degrees Machine Precision
Glass Thickness	▶ 34 mm
Sliding Rail	▶ Stainless Steel-316
Roller Bearings	▶ SS-316, 200per Bearing
Coating	▶ Powder Coating/PVDF/ Anodized
Handle	▶ 180 Degrees
Maximum Shutter Size	▶ 4.3 sq m
Maximum Shutter Height	▶ 4.2 m
Wind Resistance	▶ Up To 2.8 kpa
Air Penetration	▶ 300 pa
Water Penetration	▶ 300 pa



CS-NANO SLIM

Aluminum Nano Slim



Multi lock system



Sight Line 17 mm





90° Degree system

Configurations - CS-NANO SLIM

Nano slim looking door made up of 34mm glass and has a full fix glass to have a look into. The profile of the two-sash equal none. There is no difference in strength and to watch the view of one outside. It is the best system and gives an architect look. Is also featured with super multi lock system. Another appealing thing about it is, its smooth and easy sliding. It also takes care of the security system and the locking has a luxury handle.

Technical Windows Drawing

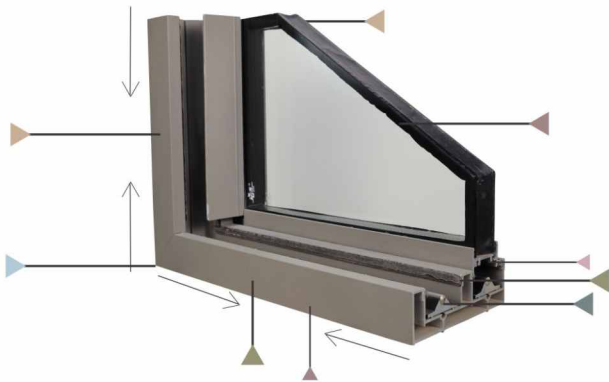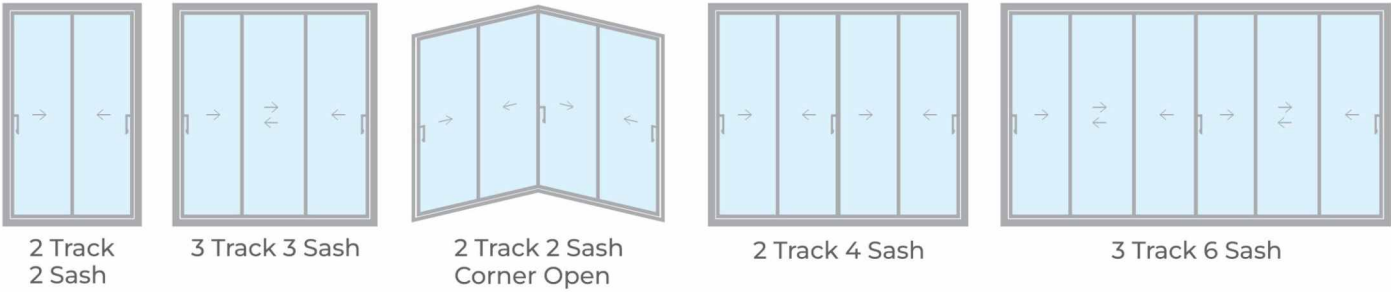

CS - NANO SLIM
Specification

Sight Line or Face Width	▶ 17 mm
Section Joint	▶ ‘L’ Clamp Fitting with Grub Screws
Sash Degree	▶ 90 Degrees Machine Precision
Glass Thickness	▶ 34 mm
Sliding Rail	▶ Stainless Steel-316
Roller Bearings	▶ SS-316, 200per Bearing
Coating	▶ Powder Coating/PVDF/ Anodized
Handle	▶ 180 Degrees
Maximum Shutter Size	▶ 4.3 sq m
Maximum Shutter Height	▶ 4.2 m
Wind Resistance	▶ Up To 2.8 kpa
Air Penetration	▶ 300 pa
Water Penetration	▶ 300 pa



CS-26 S WINDOWS

Aluminum Slim Sliding Doors



Multi lock system



Sight Line 17 mm



90°Degree
Corner Joint

Configurations CS-26 SLIM WINDOWS

It is a slim looking door made up of CS-26 Slim Windows extra strong and security system. Full fix glass to have a look into. The profile of the two sash equal none. There is no difference in strength and to watch the view of one outside. It is the best system and gives an architect look. Is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. It also takes care of the security system and locking has a luxury handle. It is one and only single system in India which facilitates un-tacked mesh and can also properly clean it out. It gives rich and splendid look form home.



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh Resistant



Water
Resistant




Colour
Choice



No
Maintenance

Technical Windows Drawing

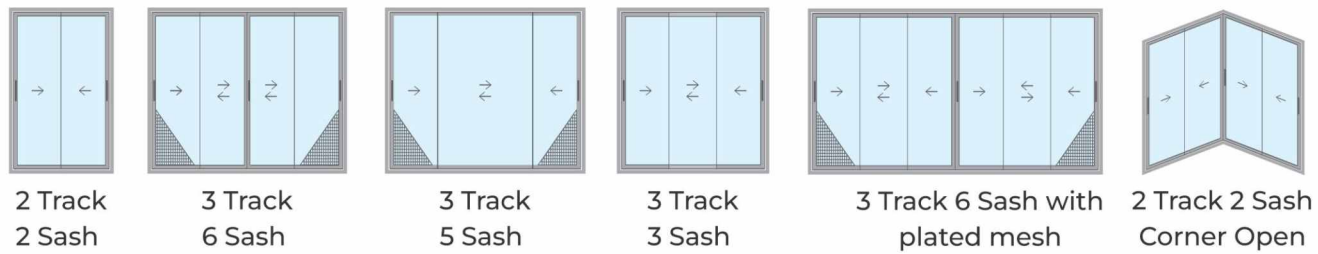

CS-26 SLIM WINDOWS Specification

Sight Line or Center face width	▶ 17mm
Section Joint	▶ Fitting with grub screws
Sash Degree	▶ 90 degrees machine precision
Glass Thickness	▶ 5 to 36 mm
Sliding Rail	▶ SS Guide
Roller Bearings	▶ 150kg per bearing
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Single point & Multi Point Locking
Maximum Shutter Size	▶ 3.9sq m
Maximum Shutter Height	▶ 3.4m
Wind Resistance	▶ Up to 2.8Kpa



CS-26 WINDOWS

Aluminum Semi Slim Sliding Doors



Multi lock system



Sight Line 26 mm



90°Degree
Corner Joint

Configurations - CS-26 WINDOWS

It is a slim looking door made up of CS-26 Windows extra strong and security system. Full fix glass to have a look into. The profile of the two sash equal none. There is no difference in strength and to watch the view of one outside. It is the best system and gives an architect look. Is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. It also takes care of the security system and locking has a luxury handle. It is one and only single system in India which facilitates un-tacked mesh and can also properly clean it out. It gives rich and splendid look form home.



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh Resistant



Water
Resistant




Colour
Choice



No
Maintenance

Technical Windows Drawing

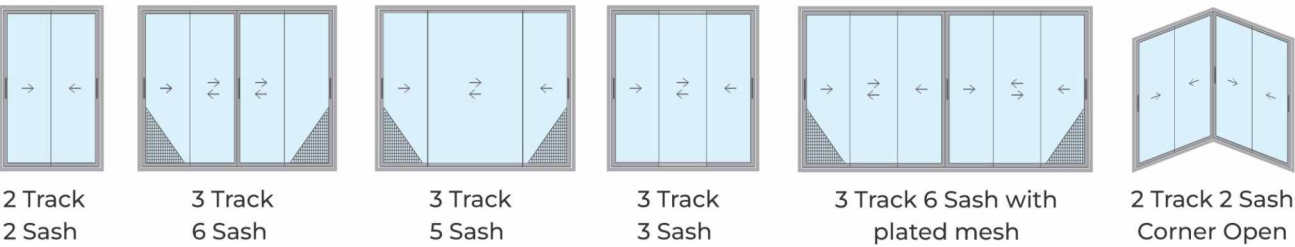

CS-26 WINDOWS
Specification

Sight Line or Center face width	▶ 26mm
Section Joint	▶ Fitting with grub screws
Sash Degree	▶ 90 degrees machine precision
Glass Thickness	▶ 5 to 36 mm
Sliding Rail	▶ SS Guide line
Roller Bearings	▶ 150kg per bearing
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Single point & Multi Point Locking
Maximum Shutter Size	▶ 3.8sq m
Maximum Shutter Height	▶ 3.2m
Wind Resistance	▶ Up to 2.8Kpa



CS-GULF WITH SLIDING GRILL

Extra Strong & Strength

4

lim

liding

afety

trenth



Multi lock system



Sight Line 25 mm



Sliding Grill


CS-GULF WITH SLIDING GRILL

Specification


Sight Line or Center Face width	25 mm
Grill	Aluminium Grill inbuilt 12/16mm Bright Bar
Sash Degree	90 Degrees Machine Precision
Glass Thickness	5 to 20 mm
Sliding Rail	Aluminum Guideline
Roller Bearings	120kg Per Bearing
Coating	Powder Coating/PVDF/ Anodized
Handle	Single Point & Multipoint Locking Both Options
Maximum Shutter Size	3.2sq m
Maximum Shutter Height	2.8m
Wind Resistance	Up To 2.8kpa

Configurations - CS-GULF WITH SLIDING GRILL


It is a slim Looking Door made up of CS-Gulf with Sliding Grill Extra Strong and Security System. full fix glass to have a look into. the profile of the two sash equal none. there is no difference in strength and to watch the view of one outside. it is the best system and gives an architect look. is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. it also takes care of the security system and locking has a luxury handle. it is one and only single system in India which facilitates un-tacked mesh and can also properly clean it out. it gives rich and splendid look form home.

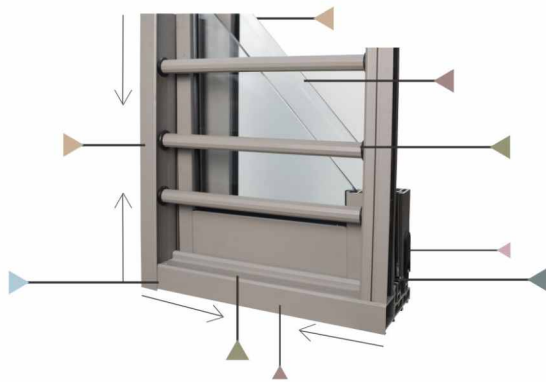

Technical Windows Drawing

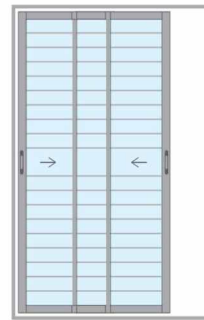

2 Track 2 Sash +
1 Fix 1 Sliding Grill

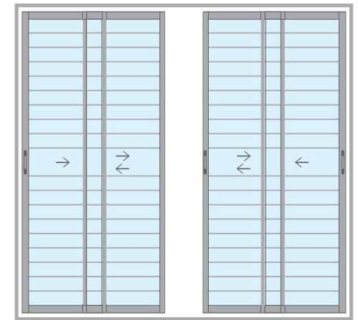

2 Track 4 Sash +
2 Fix Grill 2 Sliding Grill



CS-GULF WITH GRILL
Extra Strong & Strength



Multi lock system



Sight Line 25 mm



MS bright bar 12 to 16mm

CS-GULF WITH GRILL
Specification

Sight Line or Center face width	▶ 25 mm
Grill	▶ Aluminium Grill inbuilt 12/16mm Bright Bar
Sash Degree	▶ 90 Degrees Machine Precision
Glass Thickness	▶ 5 to 20 mm
Sliding Rail	▶ Aluminum Guideline
Roller bearings	▶ 120kg Per Bearing
Coating	▶ Powder Coating/PVDF/ Anodized
Handle	▶ Single Point & Multipoint Locking Both Options
Maximum Shutter Size	▶ 3.2sq m
Maximum Shutter Height	▶ 2.8m
Wind Resistance	▶ Up To 2.8kpa


Configurations - CS-GULF WITH GRILL

It is a slim Looking Door made up of CS-Gulf with Grill Extra Strong and Security System. full fix glass to have a look into. the profile of the two sash equal none. there is no difference in strength and to watch the view of one outside. it is the best system and gives an architect look. is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. it also takes care of the security system and locking has a luxury handle. it is one and only single system in India which facilitates untacked mesh and can also properly clean it out. it gives rich and splendid look form home.

Technical Windows Drawing




2 Track
2 Sash

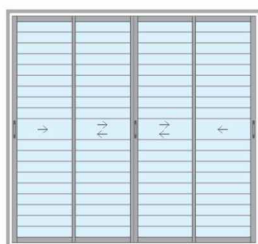

3 Track 6 Sash



3 Track 5 Sash



2 Track
2 Sash Corner Open



CS-24 S WINDOWS

Aluminum Slim Sliding Doors



Multi lock system



Sight Line 24 mm



90° Degree
Corner Joint

Configurations - CS - 24 S WINDOWS

It is a slim looking door made up of CS - 24 S Windows extra strong and security system. Full fix glass to have a look into. The profile of the two sash equal none. There is no difference in strength and to watch the view of one outside. It is the best system and gives an architect look. Is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. It also takes care of the security system and locking has a luxury handle. It is one and only single system in India which facilitates un-tacked mesh and can also properly clean it out. It gives rich and splendid look form home.



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh



Water
Resistant




Colour
Choice



No
Maintenance

Technical Windows Drawing

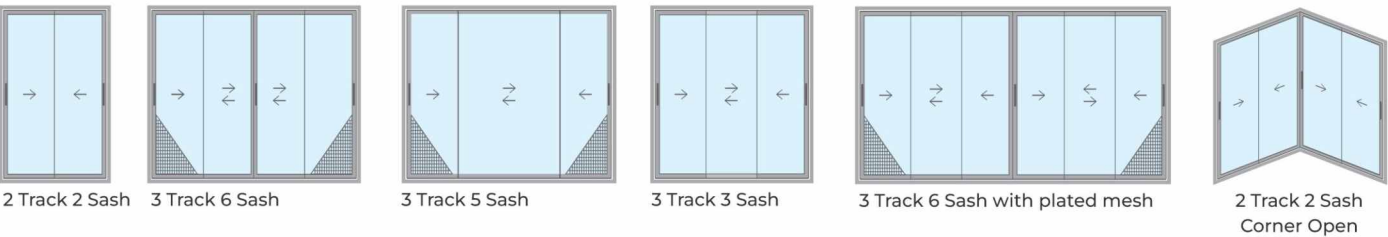


CS-24 S WINDOWS
Specification

Sight Line or Center face width	▶ 24mm
Section Joint	▶ Fitting with Grub Screws
Sash Degree	▶ 90 degrees machine precision
Glass Thickness	▶ 5 to 36 mm
Sliding Rail	▶ SS Guide line
Roller Bearings	▶ 150kg per bearing
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Single point & Multi Point Locking both Options
Maximum Shutter Size	▶ 3.2sq m
Maximum Shutter Height	▶ 2.8m
Wind Resistance	▶ Up to 2.8Kpa



CS-24 WINDOWS

Aluminum Semi Slim Sliding Doors



Multi lock system



Sight Line 24 mm




Open
Corner Windows

Configurations - CS-24 WINDOWS

It is a slim looking door made up of CS-24 Windows extra strong and security system. Full fix glass to have a look into. The profile of the two sash equal none. There is no difference in strength and to watch the view of one outside. It is the best system and gives an architect look. Is also featured with super multi lock system. Another appealing thing about it is its smooth and easy sliding. It also takes care of the security system and locking has a luxury handle. It is one and only single system in India which facilitates un-tacked mesh and can also properly clean it out. It gives rich and splendid look form home.

Technical Windows Drawing

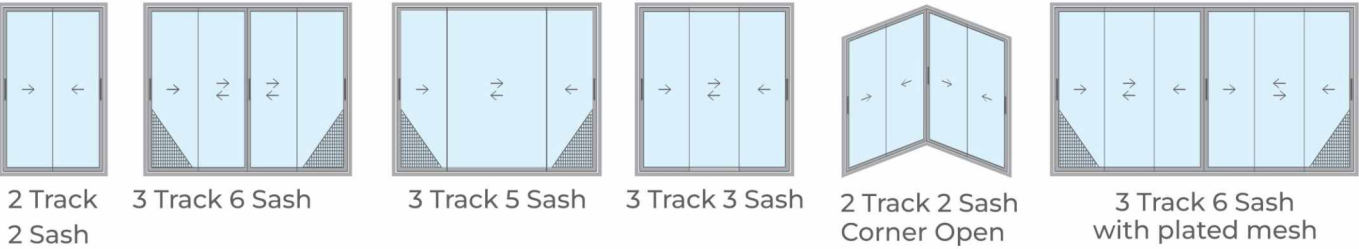

CS-24 WINDOWS

Specification

Sight Line or Center face width	▶ 24mm
Section joint	▶ Fitting With Grub Screws
Sash Degree	▶ 90 Degrees Machine Precision
Glass Thickness	▶ 5 to 20 mm
Sliding Rail	▶ Aluminum Guideline
Roller bearings	▶ 120kg Per Bearing
Coating	▶ Powder Coating/PVDF/ Anodized
Handle	▶ Single Point & Multipoint Locking Both Options
Maximum Shutter Size	▶ 3.2sq m
Maximum Shutter Height	▶ 2.8m
Wind Resistance	▶ Up To 2.8kpa



CS-23mm SLIM WINDOWS

Aluminum Semi Slim Sliding Windows



Multi lock system



Sight Line 23 mm




90° Degree
Corner Joint

Configurations - CS-23 SLIM WINDOWS

CS- 23 Slim Windows new mini-look system built up from 23 slim. The outside from this window look more beautiful. It gives a look Like full glass of frames without frames. It is made up of new innovative technology and has been designed in house. It has been created keeping in the mind Asia's environment and customer's need has been kept as priority. The flat look of the window changes the overall vision of a person. The value of the product will assure that your money is spent at the right place. There is zero level of maintenance required.

Technical Windows Drawing

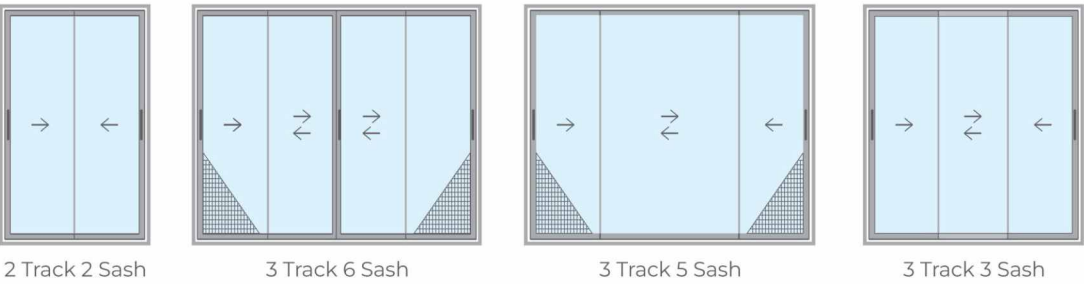

CS- 23 SLIM WINDOWS
Specification

Sight Line or Center face width	▶ 23 mm
Section Joint	▶ Fitting with Grub Screws
Sash Degree	▶ 90 Degrees Machine Precision
Glass Thickness	▶ 5 x 20 mm
Sliding Rail	▶ Aluminum Guideline
Roller Bearings	▶ 90kg per Bearing
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Single point & Multi Point Locking both Options
Maximum Shutter Height	▶ 2.8 m
Maximum shutter Size	▶ 2.6 sq mtr
Wind Resistance	▶ Up to 1.8 kpa



CS-LIFT & SLIDE DOOR



Multi lock system



45° Degree system




Smooth and
Easy to operate


Configurations - CS-LIFT & SLIDE DOOR

Natural light and transparency become the stars, creating a unique and atmosphere. Refined Aesthetic style combined with top performing technology are salient features of this wide range of frames with folding or sliding openings. Lift - and - slide doors that guarantee optimal thermal Performance. Fitted with special technical provision to make them suitable to withstand large panels.

Technical Windows Drawing

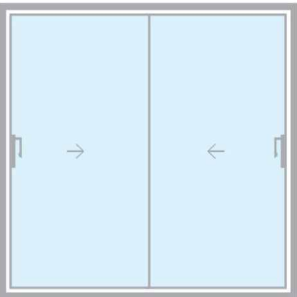

2 Track 2 Sash

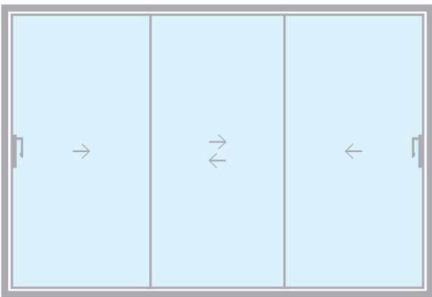

3 Track 3 Sash



CS - LIFT & SLIDE DOOR Specification

Type of Typology	► Double and triple Horizontal sliding sashes, Meeting style.
Sash Degree	► 45 Degrees Machine Precision
Glass Thickness	► 24 mm
Coating	► Powder coating/PVDF/ Anodized
Handle	► Handle single & Multi Point Locking
Maximum Shutter Width	► 2.5 mtr
Maximum shutter Height	► 3 mtr
Wind Resistance	► Up to 2.8 kpa



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh Resistant



Water
Resistant



Colour
Choice



No
Maintenance

CS-SFD 50

Aluminum Sliding Folding Door



Prevent fingers
from getting
trapped in doors



Smooth and
Easy to operate



Multi lock system

CS-SFD 50 Specification

Type of Typology	Double and triple Horizontal sliding sashes
Sash Degree	45 Degrees Machine Precision
Glass Thickness	24 mm
Coating	Powder coating/PVDF/ Anodized
Handle	Mortish Handle Multi Point Locking
Maximum Shutter Height	3.1 mtr
Wind Resistance	Up to 2.8 kpa



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh Resistant



Water
Resistant



Colour
Choice




No
Maintenance

Configurations - CS-SFD 50

CS-SFD 50 with the ability to create large glazed areas, allowing more natural light to enter a room, Sliding folding doors is the perfect solution for maximizing space and minimizing the barriers Between the inside and out,a number of opening are available,the ultimate for maximizing space.

Technical Windows Drawing

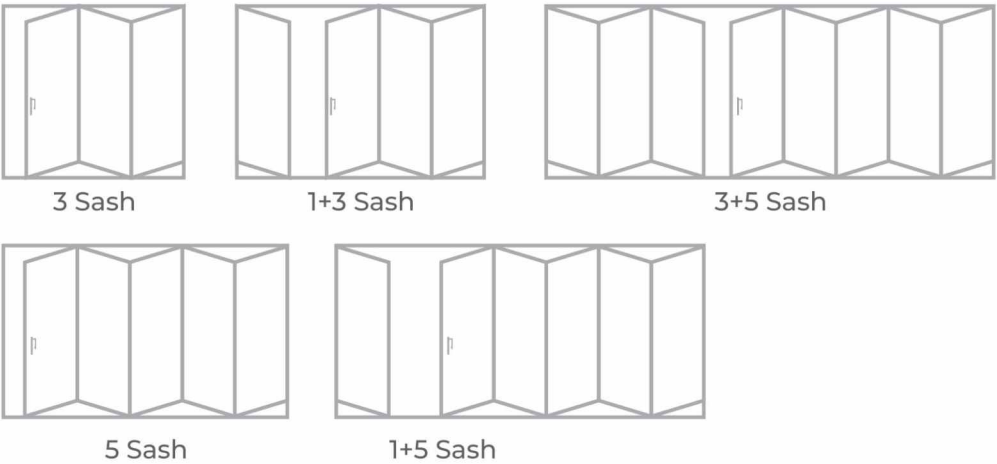

CS-50 VILLA WINDOWS

Extra Strong & Strength



Multi lock system



45° Degree system



Aluminium Grill
with 12 to 16mm Bright Bar

CS-50 VILLA WINDOWS


Specification

Sash Degree	▶ 45 degrees machine precision
Glass Thickness	▶ 5 x 20 mm
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Handle single & Multi Point Locking
Maximum Shutter Size	▶ 600 mm
Maximum shutter Height	▶ 2400 mm
Wind Resistance	▶ Up to 2.6 kpa

Configurations - CS-50 Villa Windows

This casement window series is scenic offering the maximum unobstructed view of outside with Enhanced look as it also covers features like safety grill and plated mosquito mesh solution. This series is perfect for superior outlook view and necessary conveniences.

Technical Windows Drawing

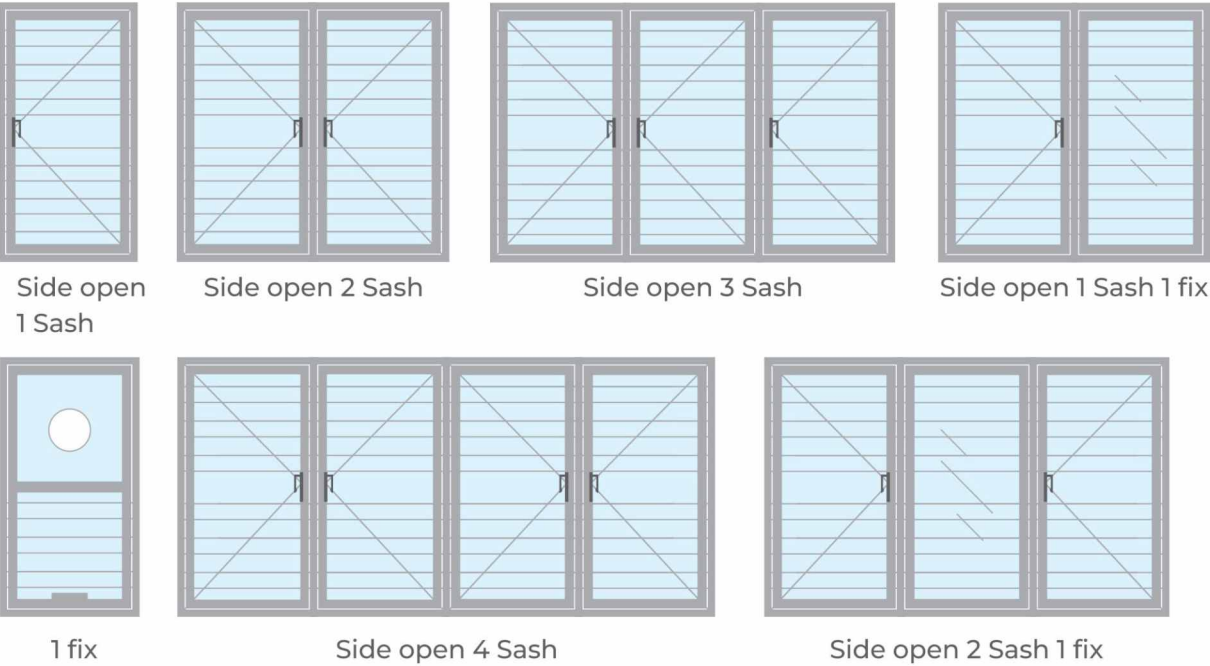

CS-40 CASEMENT WINDOWS



Multi lock system




45°Degree
Corner Joint

Configurations - CS-40 CASEMENT WINDOWS

The CS 40 Casement windows is fully open which gives a good sound proof result. There is an opening clear in the small windows. There is no Filtration through which dust and water can come out. It has a clear and straight look from out side and has no chance of step Appearance. It also has an amazing look of arctic vision which makes it more appealing.

Technical Windows Drawing

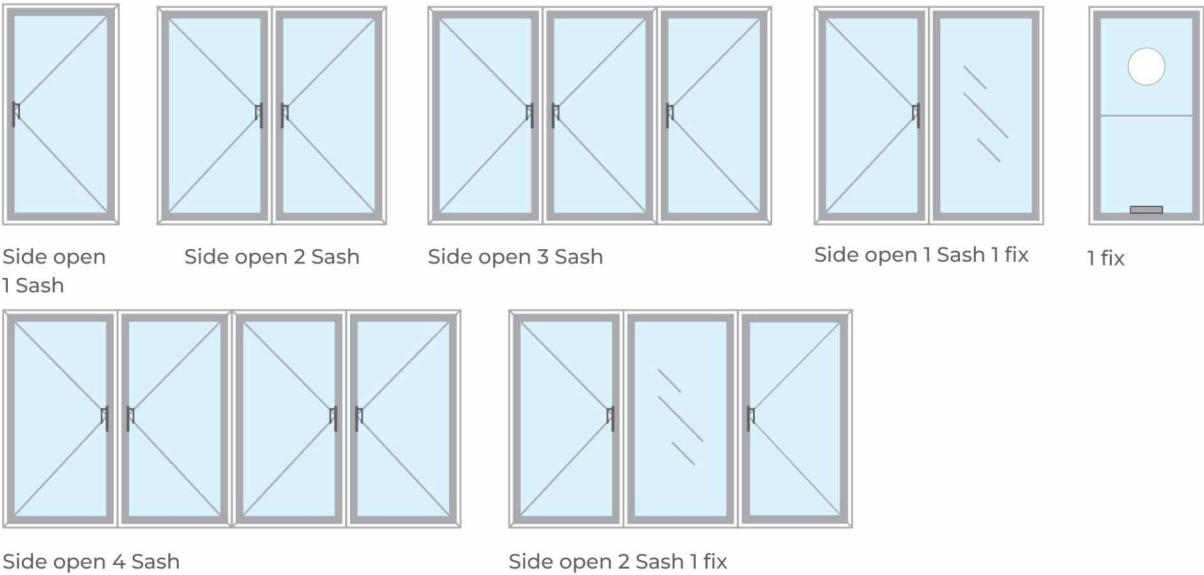

CS- 40 CASEMENT WINDOWS
Specification

Sash Degree	45 degrees machine precision
Glass Thickness	5 x 20 mm
Coating	Powder coating/PVDF/ Anodized
Handle	Handle single & Multi Point Locking
Maximum Shutter Height	1600mm
Maximum shutter width	6000mm
Wind Resistance	Up to 2.6kpa



10 Years
Guarantee



Sound
Proof



Mosquito
Plated Mesh



Water
Resistant



Colour
Choice



No
Maintenance

CW-TILT & TURN WINDOWS

Configurations

Celso Tilt and turn windows can be opened fully like a casement window (inwards) or they can be tilted from the bottom so that the top of the window is angled into the room, giving a smaller opening for ventilation. Celso's Tilt and turn windows are exceptionally easy and comfy to use. Celso's Tilt & Turn windows are designed to enhance safety standards by internal hardware with multiple locking points. Concealed hinges are designed to provide the illusion of a Fixed windows while remaining operable and no obtrusive hardware distracting the eye, lends itself to a more modern aesthetic. The performance of a tilt and turn window is superior. Better air seals yield a tighter seal, creating an air-tight window.



CW - TILT & TURN WINDOWS Specification

Sash Degree	▶ 45 degrees machine precision
Glass Thickness	▶ 5 x 20 mm
Coating	▶ Powder coating/PVDF/ Anodized
Handle	▶ Multi Point Locking
Maximum Shutter Height	▶ 1800mm
Maximum shutter width	▶ 800mm
Wind Resistance	▶ Up to 2.1kpa

CW-PARALLEL WINDOW


Configurations

Celso parallel windows are designed to move inward or outward with the limited opening, allowing no access through the window. As a result, the advantages of a circulating and safe ventilation function are combined with an increased ventilation cross section in the projecting element. This system is mainly designed for air flow and regulating temperature. Celso's parallel windows are designed to perform against heavy storms, especially when living in areas exposed to heavy wind, rain and saline air – all of which can destroy traditional timber framed windows and with enriched security standards the window delivers the high elegance.



CW - PARALLEL WINDOW Specification

Sash Degree	▶ 45 Degrees Machine Precision
Glass Thickness	▶ 5 x 20 mm
Coating	▶ Powder Coating/PVDF/ Anodized
Handle	▶ Multi Point Locking
Maximum Shutter Height	▶ 2100mm
Maximum shutter width	▶ 1000mm
Wind Resistance	▶ Up to 2.6kpa

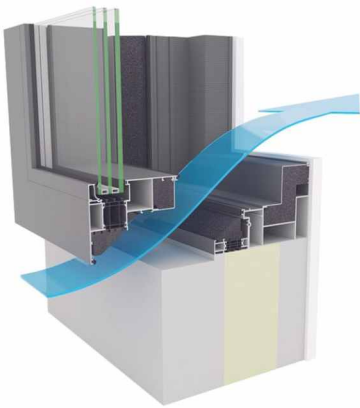

CS - FACADE SYSTEM

Configurations

Celso has Simplicity, versatility, performance and architectural elegance are the words that best describe this system. Glass Facade was conceived for maximum simplicity in creating various types of facade, with the help of specially conceived hardware. So not only vertical facades, but also sloping ones, roofs, cupolas, pyramids, tunnels and polygons. Every solution will be marked by great elegance, lightness and minimum visual clutter. External coverings with various shapes at, arched etc. give the facade a touch of personality.




CS - FACADE SYSTEM Specification

Frame Size	50x100mm/ 65x135mm
Glass Thickness	5 mm to 40 mm. Single, double & Triple Glass
Coating	Powder coating/PVDF/ Anodized
Handle	Multi Point Locking
Maximum Shutter Height	1800mm
Maximum shutter width	800mm
Wind Resistance	Up to 2.6Kpa

ALUMINIUM RETRACTABLE SECURITY MESH

Configurations

Discover the perfect synergy of security and style with our Aluminium Security Folding Mesh System. Crafted with precision and designed for strength, this folding mesh system not only provides robust security but also folds seamlessly to enhance the aesthetics of your space.

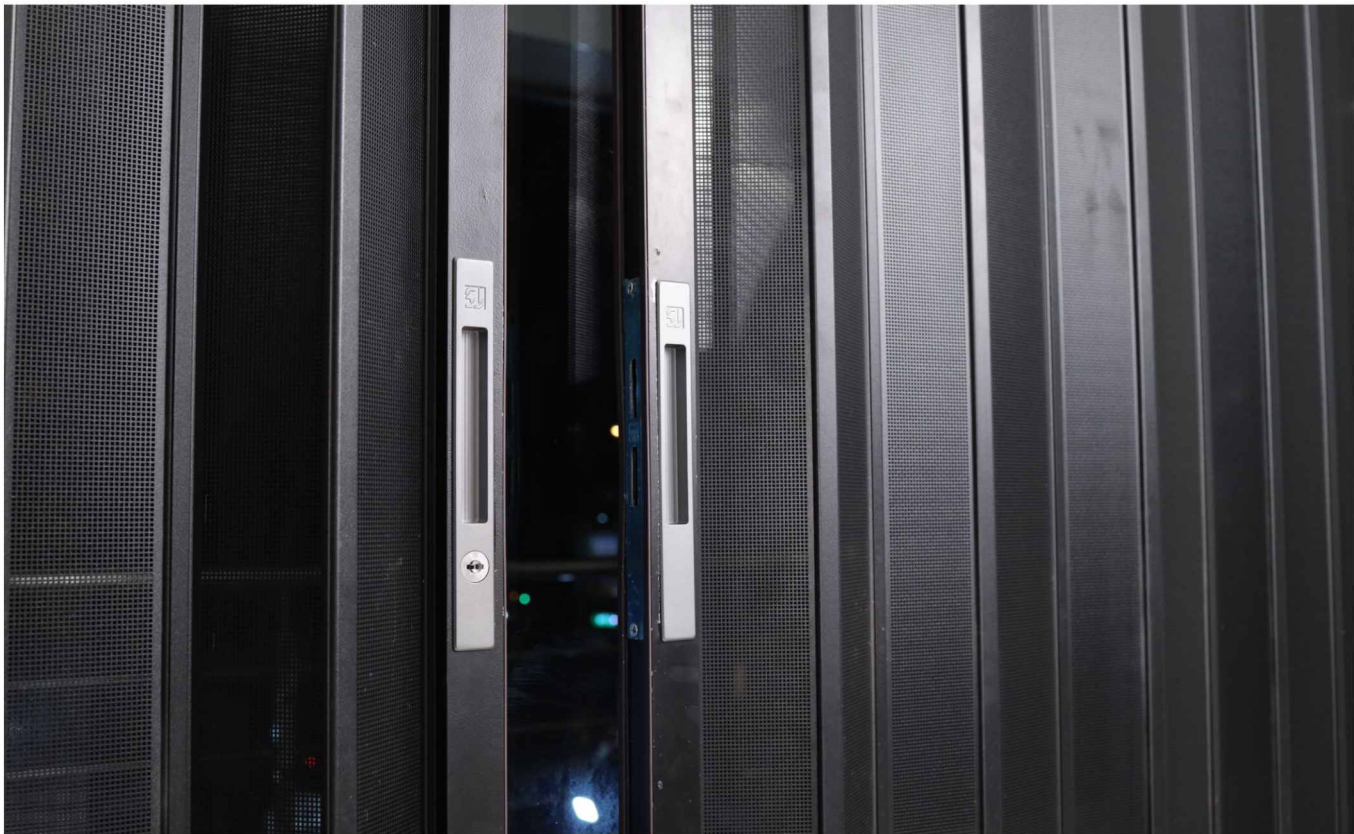


ALUMINIUM RETRACTABLE SECURITY MESH

Specification

- | | |
|---|--|
| Anti-Mosquitoes and Insect Invasion | ► Keep mosquitoes and insects at bay, ensuring a comfortable and pest-free interior. |
| High-Graded Tensile Stainless Steel Wire | ► Utilizes 1.8mm – 2.4mm high-graded tensile stainless steel wire for added |
| Multi Point Locking Security System | ► Strength and durability.
Ensures a secure environment with a |
| Stylish and Modern Folding Look | ► Multipoint locking security system. Say goodbye to traditional grill aesthetics; the folding system offers a stylish and modern appearance, eliminating the "Grill Jail Look." |

CELSO RAILING SYSTEM


Celso Railings are designed considering extravagant looks, quality and unique design. Railings are an important Fixture in any house and helps add panache to the architectural element while helping your balcony or staircase stand out a bit more. A stylish railing design is an expression of creativity not only in terms of the actual shape and structure but also when it comes to the usage of materials. Although its functionality remains the same, railing styles have dramatically evolved over the years and can be the center piece in a home and can help further accentuate the overall home decor. Celso provides a unique handrail design for indoor stairs to give a unique look to your stair case and sleek modern stair piece is one of the better simple indoor stair railings design.

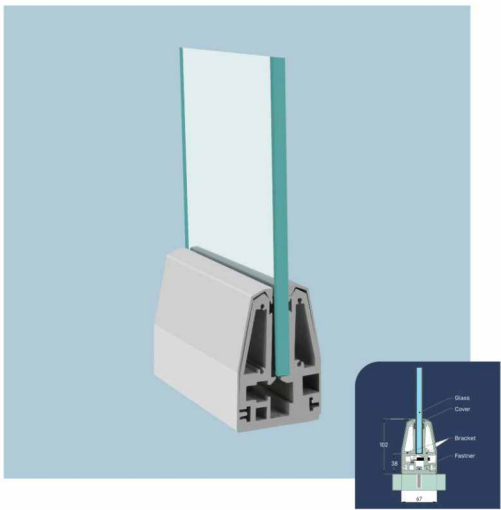

CRS - 01 STEP BRACKET

Specification


Bracket Size	65 mm x 100 mm
Compatible Glass	10/12 mm
Bracket wise	Full Cover Profile
Standard Glass Height	Max. 1050 mm

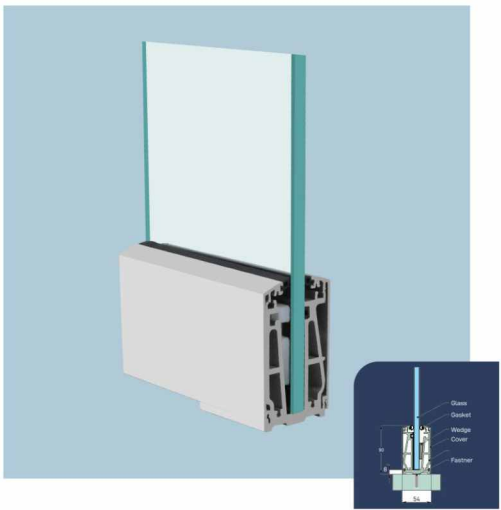

CRS - 02 STRAIGHT BRACKET

Specification

Bracket Size	50 mm x 90 mm
Compatible Glass	10/15 mm
Bracket wise	Full Cover Profile
Standard Glass Height	Max. 1050 mm

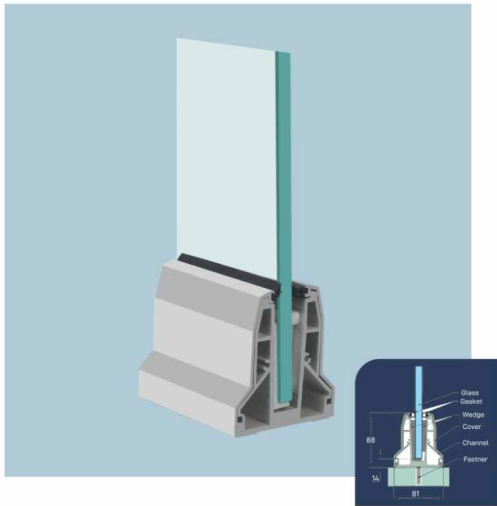

CRS - 03 NEW STEP BRACKET

Specification

Bracket Size	▶ 81 mm x 88 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm



CRS - 04 HEAVY SQUARE BRACKET

Specification


Bracket Size	▶ 40 mm x 80 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm



CRS - 05 COMMERCIAL FERI

Specification

Bracket Size	▶ 45 mm x 60 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm

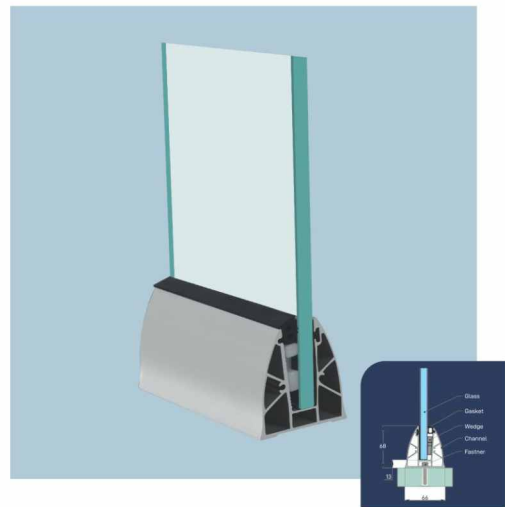

CRS - 06 MODULAR FAIRY

Specification

Bracket Size	▶ 66 mm x 68 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm



Light
Weight



Easy
Cleaning



Easy
Installation



Water
Resistant




Colour
Choice




No
Maintenance

CELSE RAILING SYSTEM

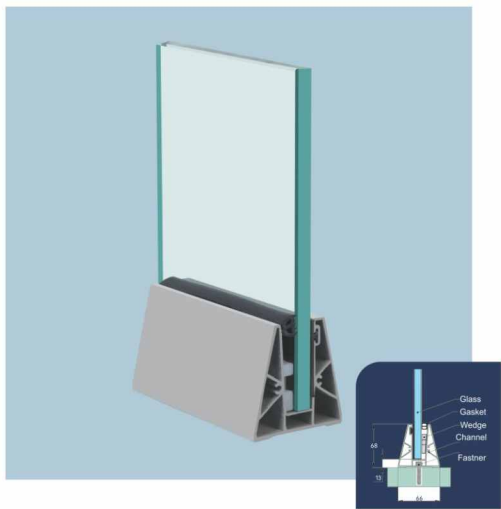

CRS - 07 TRIANGLE FERI
Specification

Bracket Size	▶ 66 mm x 68 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm

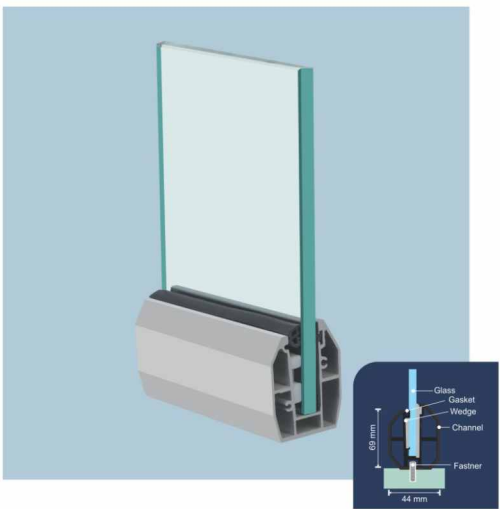


CRS - 08 STEP FERI
Specification

Bracket Size	▶ 44 mm x 69 mm
Compatible Glass	▶ 10/12 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1050 mm




CRS - 09 CURVE LINE
Specification

Bracket Size	▶ 70 mm x 80 mm
Compatible Glass	▶ 10/15 mm
Bracket wise	▶ Full Cover Profile
Standard Glass Height	▶ Max. 1150 mm

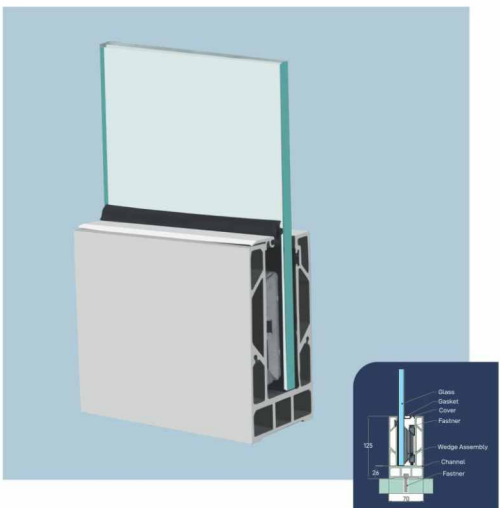

CRS - 10 HEAVY CHANNEL CONTINUE
Specification


Bracket Size	▶ 70 mm x 125 mm
Compatible Glass	▶ 10/18 mm
Full Profile	▶ only
Standard Glass Height	▶ Max. 1050 mm



CRS - Round Pipe

Specification


Top Size ► 50 x 65 mm



CRS - Square Pipe

Specification


Top Size ► 40x40 & 50x50mm



CRS - Oval Pipe

Specification


Top Size ► 35x65 mm



CRS - Enclave Pipe

Specification

Top Size ► 39x82 mm



CRS - Slim Pipe

Specification


Top Size ► 25x25 mm



CRS - Sleek Pipe

Specification

Top Size ► 38x40 mm







CRS - LED Pipe





Specification

Top Size ► 35x70 mm






Fix Degree Connector




Wall Conceal





Hand Rail End Cape



Bracket End Cape

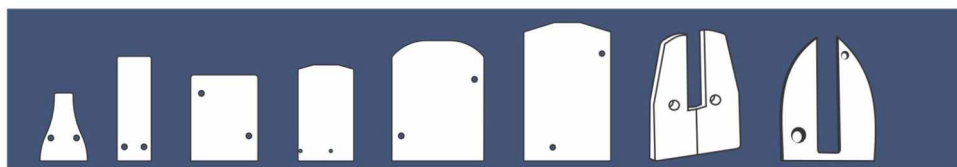


CS - SPLIT SLIDING PARTITION SYNCHRONIZED DOOR

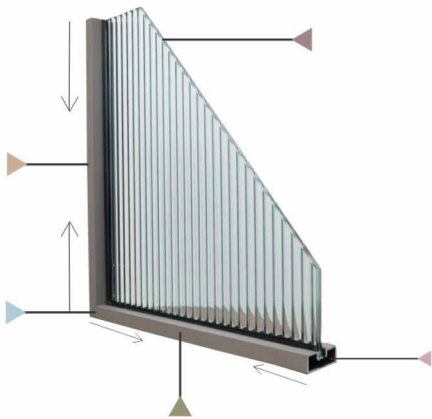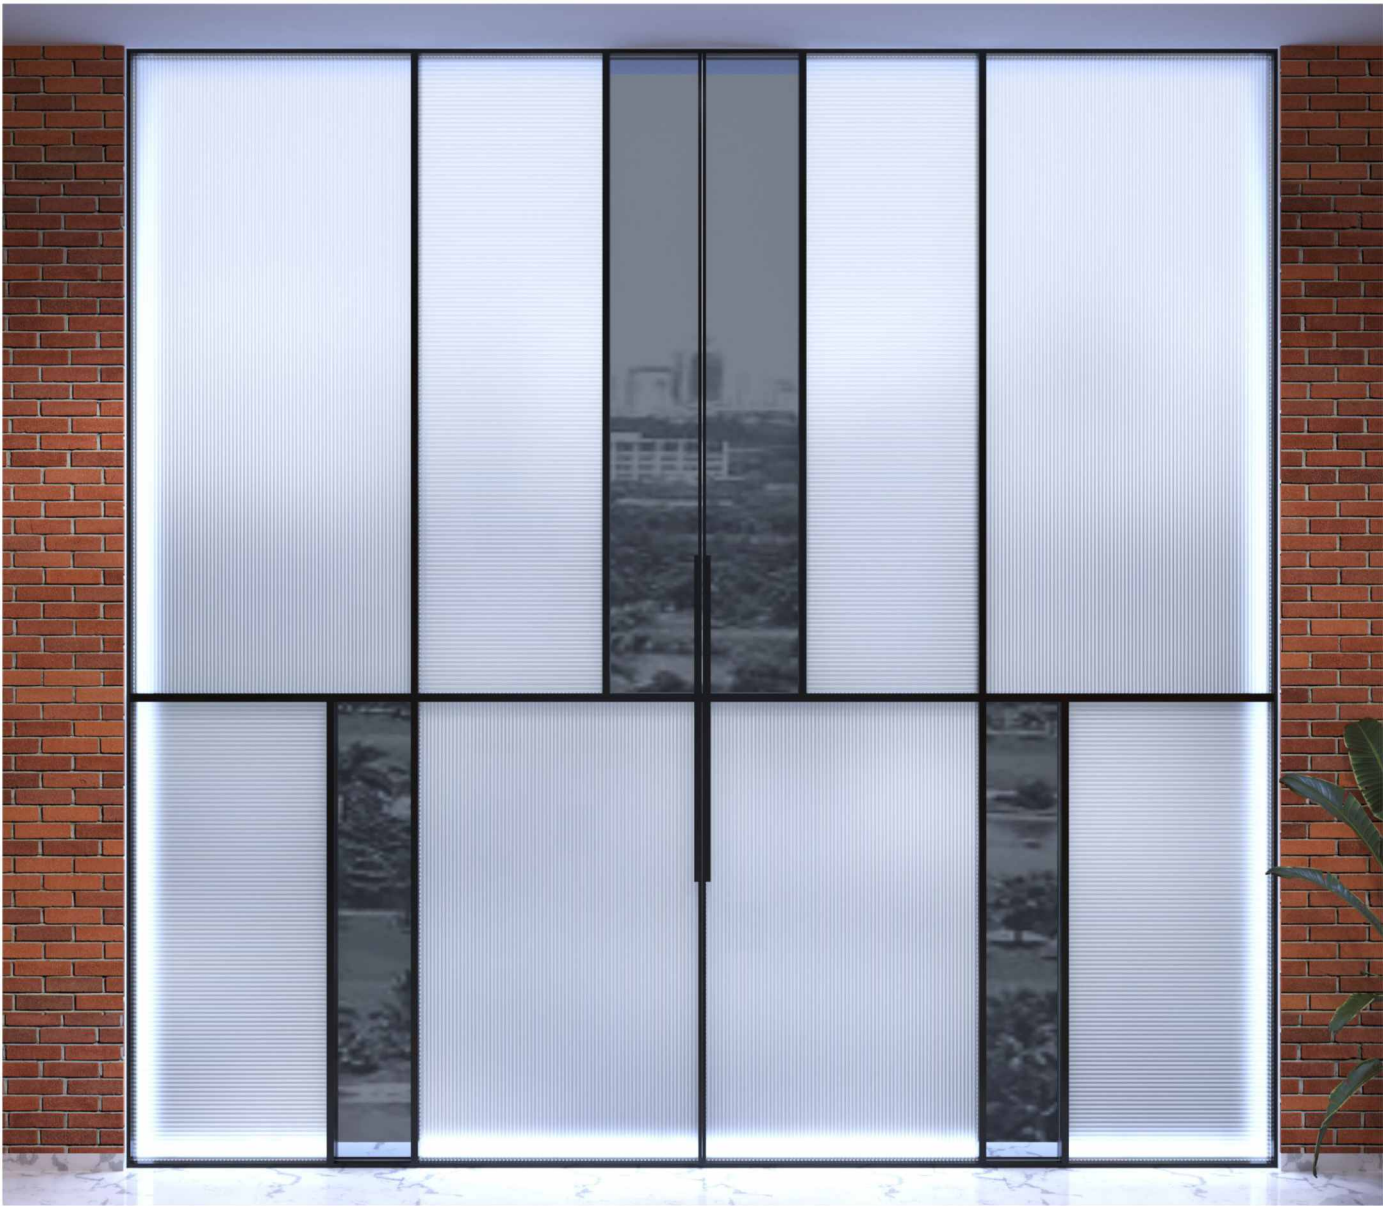

CS - SPLIT SLIDING PARTITION SYNCHRONIZED DOOR Specification

Sight Line	▶ 16 mm
Frame Size	▶ 16 x 45 mm
Glass Thickness	▶ 8 mm Glass Types Fabric/Fluted any of the Choice
Joints	▶ 45 Degree

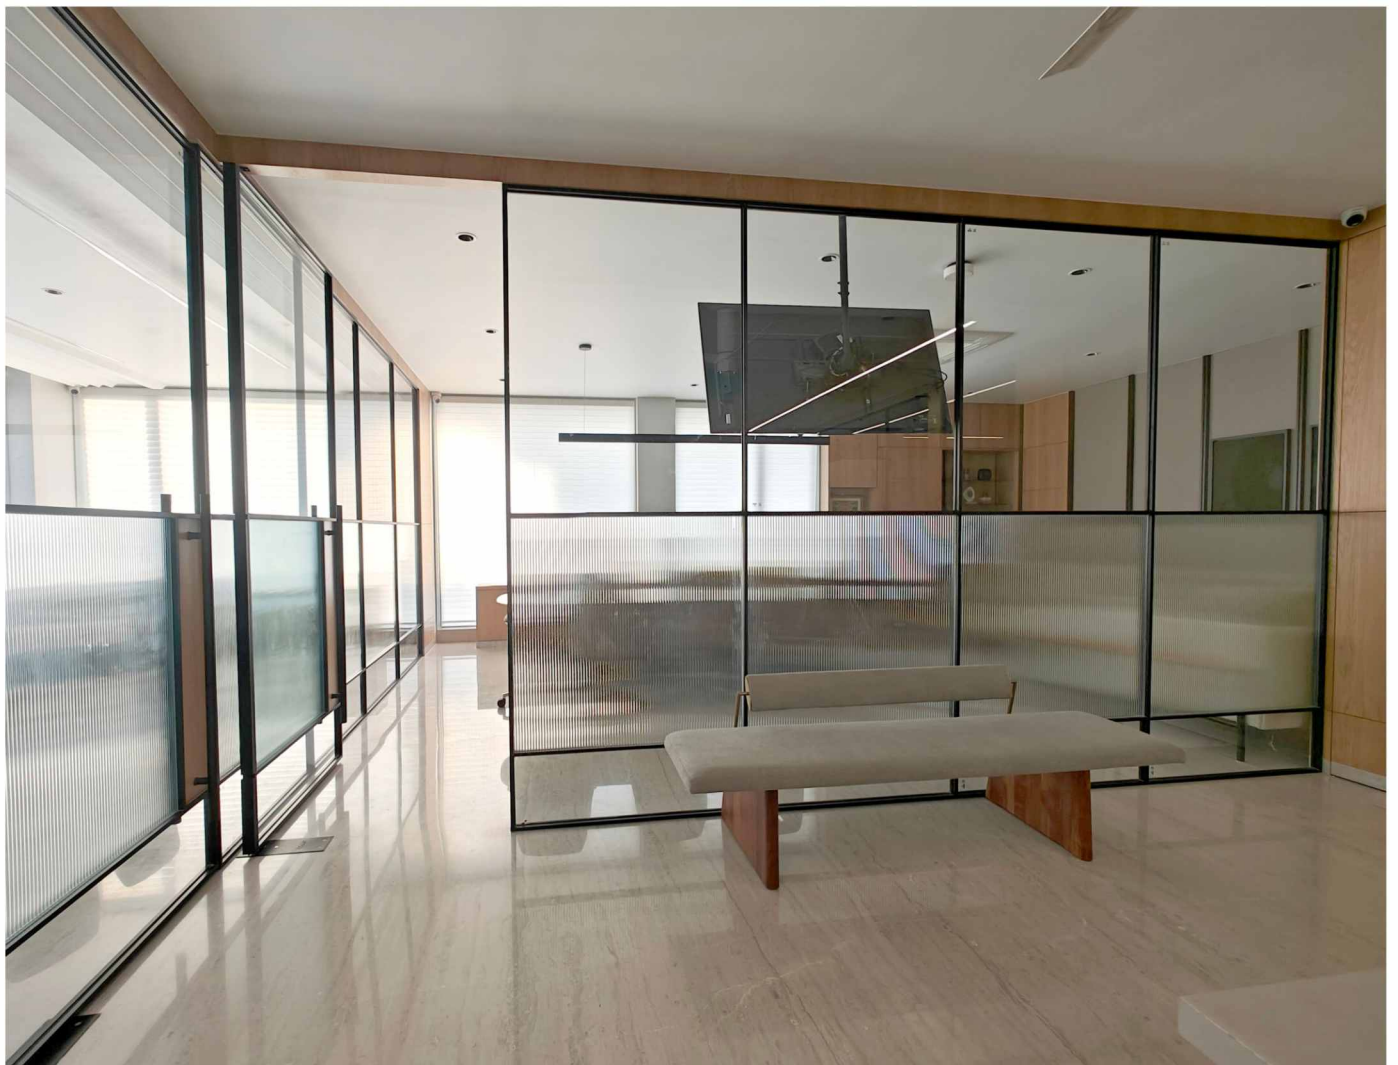


UPVC WINDOWS




- ▶ Endurance and performance in every profile
- ▶ Multi-chambered profiles ensure high strength, insulation, acoustic & security
- ▶ 2.8 mm wall thickness & GI reinforcement for withstanding heavy wind loads
Make wide variety of Windows and Doors.
- ▶ Wide range of Profiles
- ▶ Upto 65% opening widths
- ▶ Pioneers in 7 feet to 10 feet doors Quality that lasts for more than 10 years
- ▶ 6-8 PHR of TiO_2 ensures best color and exterior weatherability.
- ▶ 8-10 PHR of CaCO_3 improves mechanical properties. Extreme scrutiny that ensures unparalleled quality
- ▶ uPVC profiles conform to the European standards



OPERABLE GLASS LOUVERS

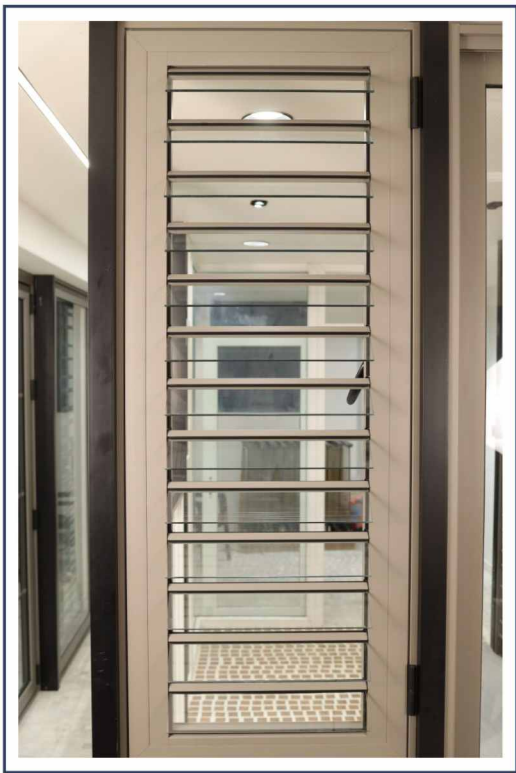

Open View

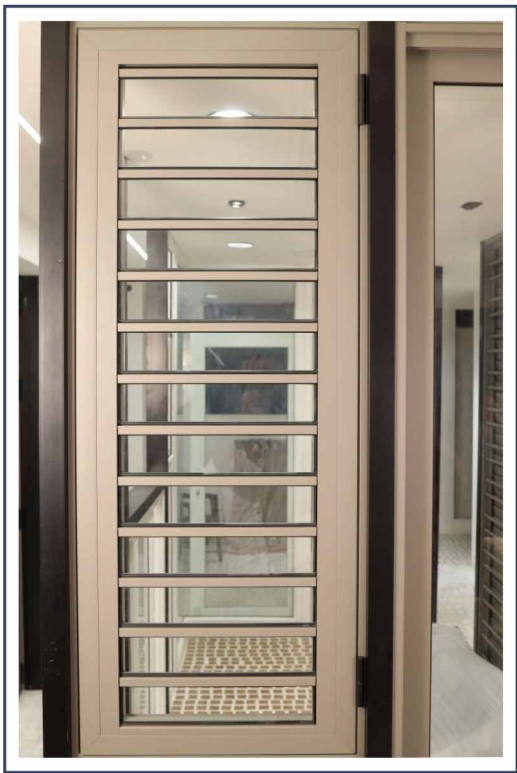

Close View

OPERABLE GLASS LOUVERS




Open View



Close View

Celso End to End Process

Design & Consulting | Production | Delivery
Installation | Sale Services



Celsö
italy windows series



Celsö

italy windows series

SHREE RAM FIBER

SRF BUILD TECHNO INDUSTRIES

Customer Care : +91 2646 359634

Ankleshwar Showroom

2nd Floor, Shop No. 19/20/21,
Signature Galleria, Mahavir Turning,
Old NH. Highway, Ankleshwar 393001

Ahmedabad Showroom

GF&FF Floor, Swetayan Square,
Behind D Mart Godown, Bhat,
Ahmedabad, 382210

Factory

Plot No.18, Yogi Estate, Nr. Gokul Party Plot,
G.I.D.C, Ankleshwar 393002.
+91 81415 23081 | +91 99138 12953/853

Email : srfupvcwindows@gmail.com

Web : www.celsowindows.com



SCAN OUR PROJECTS